


USB 3.1 Superspeed+ 2x Type-A


Compatible to USB 3.0 / 2.0

Data transfer up to 10 Gbps

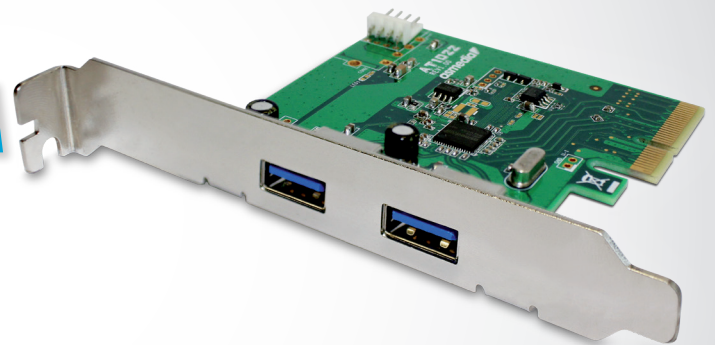

FANTEC PCI-Express Card

Upgrade your PC with the FANTEC PCI Express card by two internal USB 3.1 Ports. The interface is backward compatible to USB 1.1 & 3.0, 2.0. USB 3.1 SUPERSPEED+ supports data transfer up to 10 Gbps. No additional power supply is necessary, it is supplied via the USB 3.1 interface and offers maximum +5V DC / 900 mA power output.

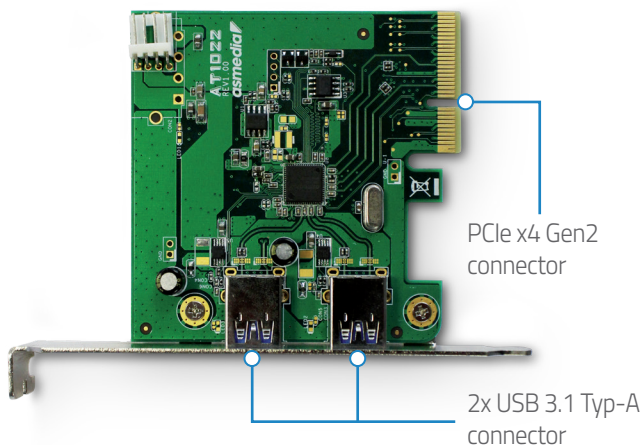

Specifications

- ASMedia Universal Serial Bus 3.1-Host-Controller
- Bridge PCI Express to USB 3.1
- 2x USB 3.1 SUPERSPEED+ Typ-A Port
- Data transfer up to 10Gbps (via USB 3.1)
- Compatible with USB 3.0, USB 2.0 and USB 1.1
- Compliant with Intel eXtensible Hot Controller Interface rev. 1.1
- PCI Express Gen2 x2 or Gen3 x1 support
- Compliant with USB Attach SCSI Protocol revision 1.0
- Power output USB +5V DC / 900 mA
- Support Hot Swap and Plug-n-Play
- Windows 7/8/8.1/10, Linux

System Requirements

- One available x4, x8 oder x16 PCI Express Slot. (PCI Express Gen. 2.0 at least)
- Windows 7/8/8.1/10, various Linux kernels

Note

- In order to get USB 3.1 SuperSpeed+ performance, please use PCI Express Generation 2 slot for card installation.

Package Content

- PCI-Express Card
- Item-No. 1783 - EAN 4250273417838
- Warranty card

Dimensions (item)

- 121 x 90.1 x 21.5mm (W x D x H)
- Weight ~0.040Kg

Dimensions (retail box)

- 165 x 115 x 25mm (W x D x H)
- Weight ~0.081Kg

Dimensions (export carton)

- 380 x 340 x 280mm (W x D x H)
- 58 pcs each carton
- Netto-weight ~4.7Kg